



COMMISSION DELEGATED REGULATION (EU) 2019/2016

Technical Documentation

professional chest freezers

model: **ZS-350**



BYFAL sp. z o.o.
ul. Perłowa 17
77-132 Niezabyszewo
Poland



More information at: www.byfal.pl




Information card

Chest freezer for professional use for storing and freezing products.

Model identifier	ZS-350		Klasa energetyczna (UE)2019/2016		
Design type	freestanding				
Climate class	Temperate - N				
Winter setting	None				
Duration of the guarantee [month]	24				
Minimum ambient temperature (°C) for which the refrigerating appliance is suitable	16	Maximum ambient temperature (°C) for which the refrigerating appliance is suitable	32		
Annual energy consumption (kWh/a)	285,92	Compartment type	3-star		
EEI	120,7	Airborne acoustical noise emissions (dB(A) re 1pW)	39		
Energy efficiency class	F	Airborne acoustical noise emission class	C		
Freezing capacity (kg/24h)	16	Defrosting type	Manual defrost		
Recommended temperature setting for optimised food storage (°C)	-18	Compartment Volume (dm³ or l)	314	Light	None

Dimensions

L Width	Lw	S Depth	Sw	H Height	Hw	Packing LxSxH	Net weight	Gross weight
1285	1099	760	473	860	660	1,34 x 0,80 x 0,90	53	65

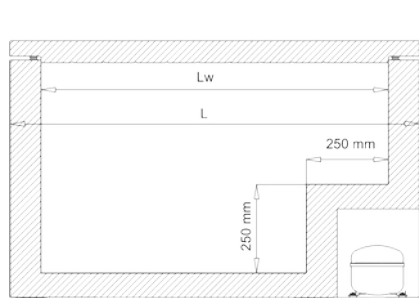

Additional information and instructions can be found on our website: www.byfal.pl

Specification

The freezer is built in the shape of a horizontal cabinet. Freezer walls are insulated with polyurethane foam. Outer coat is made of galvanized sheet metal covered with PVC which makes it resistant to corrosion and scratches. Side interior walls of the freezer are made of 99% pure aluminum sheet and the bottom is made of steel sheet covered with a coating that is approved for contact with food. An evaporator is placed under the aluminum sheet. On the front wall under the outer coat there is a condenser. The freezer has a hinged lid. In addition, the refrigeration system includes a compressor and expansion valve in the form of a capillary tube and a filter. An electronic controller is used to control the compressor operation. This allows you to change the setting of the desired cooling temperature and additionally displays the current temperature of the cooling chamber.

General product specifications (EU)2019/2016 zał. VI pkt 1.b.

		<i>Value</i>
Power supply	V/Hz	230 / 50
Current nom./max.	A	0,31 / 5
Installed power	W	74
Baskets	pcs	1
Adjustable feet	pcs	4
Refrigerant	IP	R600
Refrigerant dose	g	45
Defrosting		Manual

<i>Parameter</i>		<i>Value</i>	<i>Parameter</i>		<i>Value</i>
Annual energy consumption	(kWh/r)	285,92	Auxiliary energy	(kWh/r)	0
Standard annual energy consumption	(kWh/r)	236,91	EEL	(%)	120,7
Temperature rise time	(h)	12	Combi parameter	C	1,00
Door heat loss factor	D	1,00	Load factor	L	0,9
Anti-condensation heater type		BRAK			
Daily energy consumption at 16 °C	(kWh/24h)	0,58	Daily energy consumption at 32 °C	(kWh/24h)	0,83
Compartment type	3-star				
<i>Target temperature</i> (°C)	<i>Thermodynamic parameter</i> r_c	N_c	M_c	<i>Defrost factor</i> A_c	<i>Built-in factor</i> B_c
-18	2,1	138	0,15	1	1

Additional information

The product complies with the following harmonised standards:

PN-EN PN-EN 60335-1:2012/A14:2020-05
 PN-EN 60335-2-24:2010
 PN-EN 55014-1:2017-16
 PN-EN IEC 61000-3-2:2019-04
 PN-EN 61000-3-3:2013-10
 PN-EN 61000-4-2:2011
 PN-EN 61000-4-4:2013-05
 PN-EN 61000-4-5:2014-10
 PN-EN 61000-4-6:2014-04
 PN-EN IEC 61000-4-11:2020-11

Model identifier

Freezer ZS-350/X

/X – method of controlling a device

/1 – electro-mechanical thermostat

/2 – electronic controller with temperature display

/3 – as above + relay for controlling e.g. lighting

+ Super Frost function

So when ordering ZS-350/2 model we get: freezer ZS-350 with electronic controller as in the example photo on page 1 of this information sheet.

Special precautions

- Please read manual carefully before unpacking and installing. To ensure safety, the instructions must be strictly followed.
- The appliance may be connected to the mains by an authorized person after reading the manual. The connection can be done only to a grounded socket to avoid electric shock.
- It is forbidden to make holes in the housing of the device. It may cause release of flammable refrigerant.
- Air vents in the housing of the appliance must not be obstructed.
- The freezer should be placed in such a way that the plug is accessible.
- You can not obstruct the front wall of the freezer or stick on it thick insulating stickers.
- Make sure that the appliance is not standing on the power supply cable.
- Install the appliance in a dry room with the area of not less than 4m², above the ground level. Avoid locations near a source of heat or in direct sunlight. The temperature in the room must not be lower than 16°C.
- Installation and maintenance of the appliance may not be done by persons (including children) with reduced physical, sensory or mental capabilities.
- Do not store glass containers with liquids, electrical appliances or other objects with sharp edges inside the freezer.
- In the case of freezer failure or damage the power cable insulation, repairs may be made only by a person authorized to repair this type of appliance.
- **Attention! Danger of explosion or fire.**

The installation contains flammable gas. Perforation of the internal or external walls of the housing can cause escape of the flammable refrigerant .

If such a case occurs, the freezer lid should not be closed. Do not use near open flames or sparking devices. Disconnect the appliance from the mains power supply, remove it outside and only there you can take out the products.

Energy efficiency class:

Determination of the energy efficiency class
in accordance with the Commission Delegated Regulation (UE) 2019/2016
of 11 march 2019r.

Storage conditions and target temperature per compartment type.

Group	Compartment type	Storage conditions		T _c
		T min	T max	
Name	Name	°C	°C	°C
Frozen compartments	3-star	nd.	-18	-18

Determination of the EEI:

$$E_{\text{daily}} = 0,5 \times (E_{16} + E_{32}) = 0,5 \times (0,58 + 0,83) = 0,705$$

$$AE = 365 \times E_{\text{daily}}/L + E_{\text{AUX}} = 365 \times 0,705 / 0,9 = 285,92$$

$$SAE = C \times D \times A_c \times B_c \times [V_c/V] \times (N_c + V \times r_c \times M_c) = 1 \times 1 \times 1 \times 1 \times [314 / 314] \times (138 + 314 \times 2,1 \times 0,15) = 236,91$$

$$EEI = AE/SAE = 285,92 / 236,91 = 1,207 \times 100 = 120,7\%$$

E₁₆ and E₃₂ - Determined in a laboratory test in accordance with PN-EN-62552-3_2021-01E

Energy efficiency classes	Energy efficiency index
A	EEI < 41
B	41 < EEI ≤ 51
C	51 < EEI ≤ 64
D	64 < EEI ≤ 80
E	80 < EEI ≤ 100
F	100 < EEI ≤ 125
G	EEI > 125

